


# aPower

## AC-coupled battery

Store solar generated power while the sun is shining. Use the stored energy when needed to lower electric bills. Run heavy loads such as air conditioners and water heaters as usual even during grid outages. Provide homeowner peace of mind by fully charging before severe weather events.

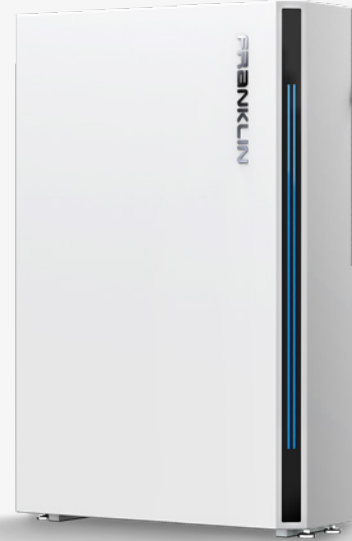

- ✓ Safe LFP chemistry
- ✓ Built-in inverter
- ✓ 13.6 kWh per unit, up to 204 kWh (15 units) per aGate
- ✓ 5 kW continuous / 10 kW peak for 10s (discharge)


- ✓ Normal operations down to -4°F (-20°C)
- ✓ IP67 protection
- ✓ Single aPower capable of starting a 4-Ton AC
- ✓ First-of-its-kind 208 V compliant battery for multi-family housing

### PERFORMANCE SPECIFICATIONS

Battery Chemistry	Lithium Iron Phosphate (LFP)
Usable System Energy	13.6 kWh per unit, up to 15 units <sup>1</sup> per aGate
Aggregate Throughput	43 MWh
Real Power (charge)	5 kW continuous, 7.6 kW peak for 30 minutes
Real Power (discharge)	5 kW continuous, 10 kW peak for 10 seconds
Load Start Capability	118 A LRA <sup>2</sup>
Nominal AC Voltage	120 / 208 V, 120 / 240 V, 60 Hz
Coupling	AC-coupled
Phase	2 W+N+PE
Round Trip Efficiency	89% <sup>3</sup>
Work Modes	Self-Consumption, Time of Use, Emergency Backup
Noise Emission	< 30 dB (A) <sup>4</sup>
User Interface	FranklinWH App
Warranty	12 years

### MECHANICAL SPECIFICATIONS

Dimensions (H x W x D)	45.3 in x 29.5 in x 11.4 in (1150 mm x 750 mm x 290 mm)
Weight	395 lb (179 kg)
Mounting	Wall mount or floor mount
Cooling	Natural air-cooled design

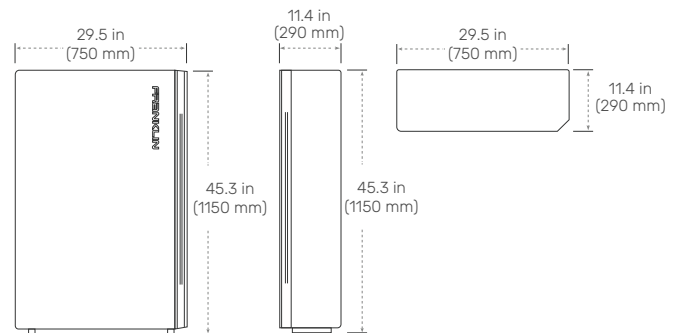

### COMPLIANCE INFORMATION

Certifications	UL 9540, UL 9540A, UL 1741, UL 1973, IEEE 1547, IEEE 1547.1, UN 38.3, CAN/CSA C22.2 No. 107.1-16
Seismic	AC 156, OSHPD, IEEE 693-2005 (high)
Environmental	California Proposition 65 RoHS Directive 2011 / EU
Emissions	FCC Part 15 Class B, ICES 003

### ENVIRONMENTAL SPECIFICATIONS


Ingress Protection	IP67 (Battery and power converter system), IP56 (Wiring compartment)
Operating Temperature	-4°F to 122°F (-20°C to 50°C)
Operating Humidity (RH)	Up to 100% RH, condensing
Altitude	Maximum 9,843 ft (3,000 m)
Environment	Indoor and outdoor rated

1. For 120 / 208V applications, max. 4 aPowers per aGate can be connected in parallel. Please contact us if you have large capacity requirements.  
2. Load start capability may vary.


3. At beginning of life, AC to battery to AC, 50% power rating.  
4. 5 kW discharge power, no fan running.

# Franklin Home Power Solution

## Whole Home Backup

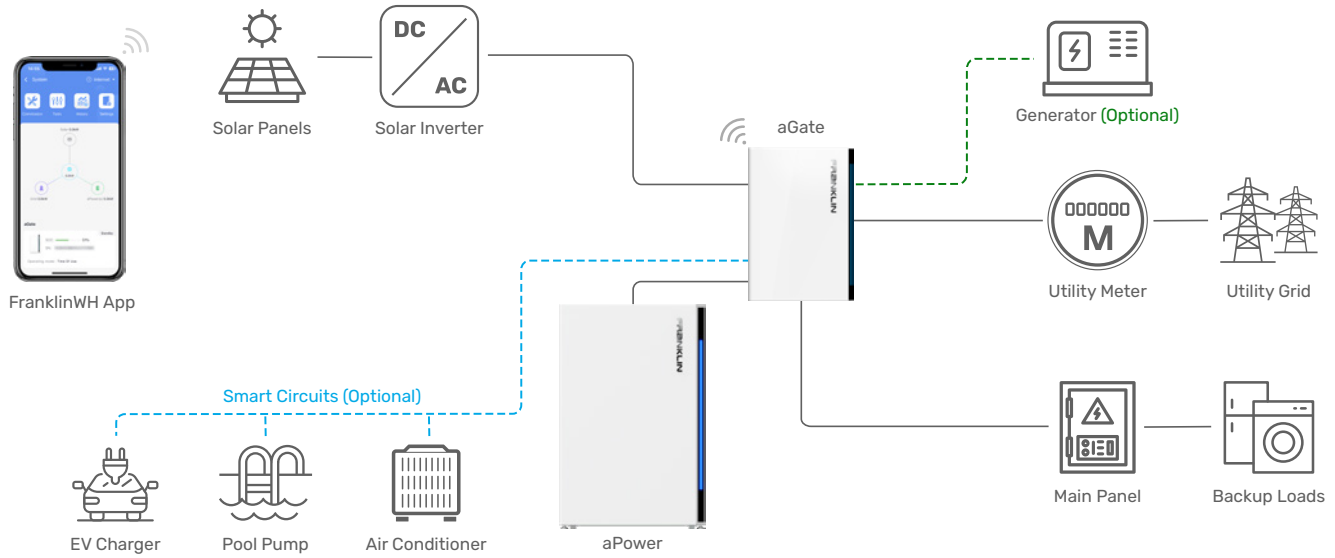

## Partial Home Backup

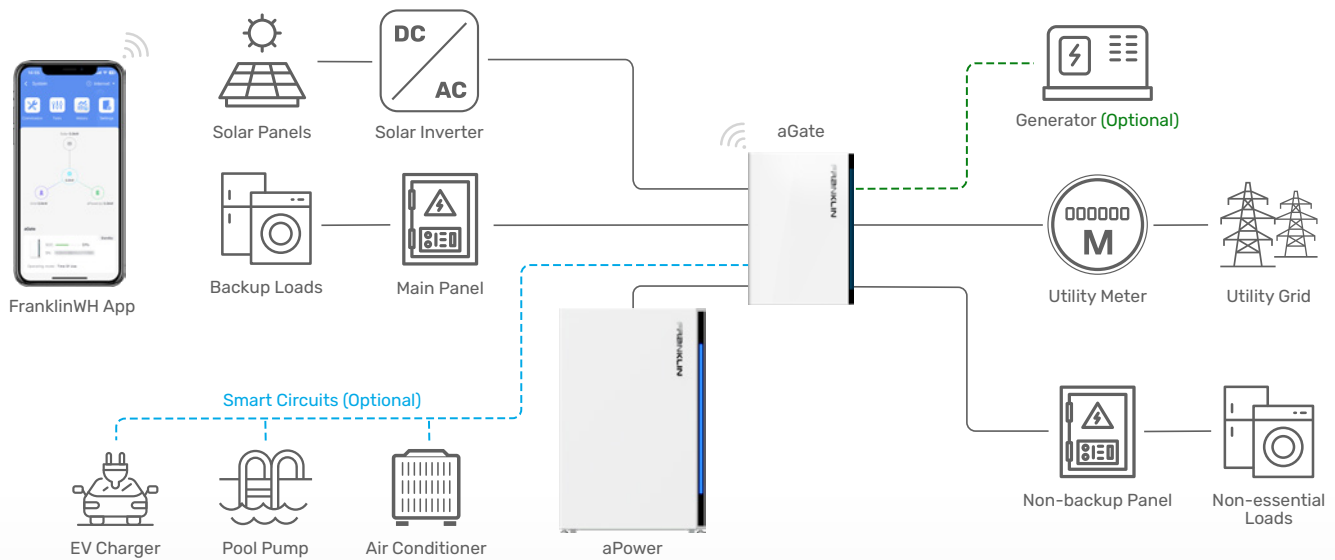

Address: 1731 Technology Dr., Suite 530 San Jose, CA 95110 Telephone: +1 888-837-2655 Email: info@franklinwh.com Website: www.franklinwh.com

Copyright 2024 FranklinWH Energy Storage Inc. All rights reserved. The Franklin logo, FranklinWH, and other trademarks or service names are the trademarks of FranklinWH Energy Storage Inc. The document is for informational purposes only, data subject to change. 2024-02-29

